



Timer for ATEX areas

- II 2G Ex db IIC T6 Gb
- II 2D Ex tb IIIC T80°C Db

Application:

Configurable push button suitable for diverse applications: double-sided, single-sided, or switch (continuous light). Externally adjustable switch, perfect for Lumistar luminaires and other devices in hazardous environments.

Advantages:

- Autonomous management of device timing (e.g., illumination of process sequences).
- Management of time modules for lighting and other equipment.

Assemblage

Depending on the version, the push button may be installed up to 5 meters from the luminaire equipped with an internal timer or dimming module.


Power supply:

The device (e.g., projector) receives power through the terminals incorporated within the push button housing.



	Rated voltage	Version	Utilize with
Timer	24 V, 110-240 V	Press button	T6 / T80 °C
	24 V, 110-240 V	Pushbutton / switch	T6 / T80 °C

Lumistar Push Button Specifications

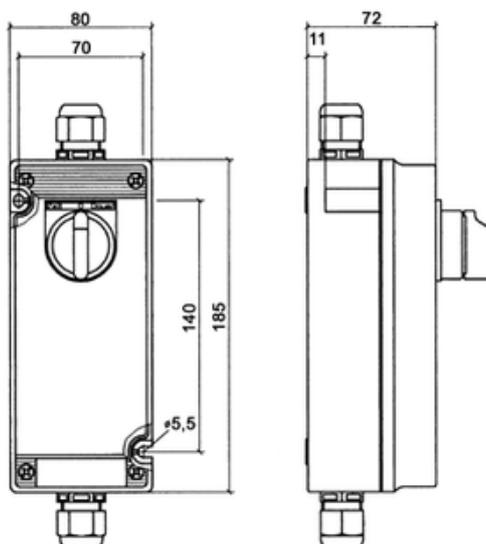

<https://www.gallet-fr.com>