

## EG2 type windscreen wiper operated by a flexible hose for DIN28120 portholes or their derivatives.

### Installation:

Pressure-resistant connection through flanges.

### Safety Precautions:

- Never open under pressure! Reduce pressure to zero before any operation.
- Do not look directly at the light! Risk of vision damage.

### Usage:

Designed for manual cleaning of sight glasses. Particularly suitable for pressurized equipment, whether in explosive atmospheres or not. The sight glasses comply with DIN 7080 or DIN 8902 standards. Compatible with sight glasses ranging from DN 100 to DN 200.

### Operating Conditions:

- Vacuum-tight
- Pressure resistance: up to 16 bars
- Operating temperature: up to 220°C, depending on the type of glass used.

### Possible Combinations:

- The EG-2 wiper can be combined with LUMIGLAS luminaires, whether explosion-proof or not, as well as with a washing system.

### Material Specifications:

Wiper blade: PTFE or silicone


Wiper mechanism: All parts in contact with the product are made of stainless steel.

Internal sealing ensured by PTFE seals.

- Pos. 1: Ratchet-operated handle
- Pos. 2: Pass-through connection
- Pos. 3: Guide tube for flexible shaft
- Pos. 4: Wiper holder with blade

### Installation & Operation:

The wiper holder is driven by a flexible shaft operated externally via a ratchet handle, ensuring rotation in one direction only. A detailed installation manual is available. If the wiper is ordered with its sight glass, adaptation is carried out by our team.

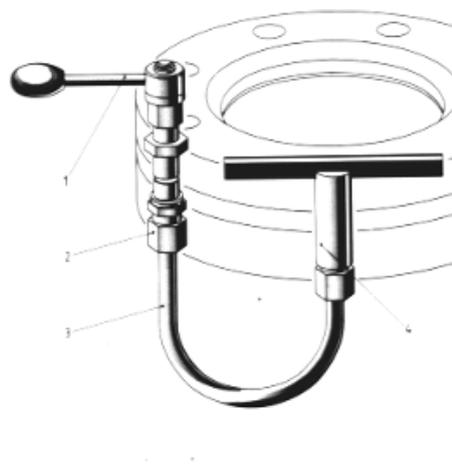

<https://www.gallet-fr.com>