


PROTECTIVE BARRIER

Use:

The stainless steel protective grille is compatible with DIN 28120 sight glasses and those derived from DIN 11851.

Features and Assembly:

The grid is constructed from 304 stainless steel, featuring a 4.5mm mesh with a 1mm wire diameter. It is secured using four M6 stainless steel A2 screws on the counter flange (or the grooved nut for screw-in sight glasses). Due to its independent assembly from the sight glass, the grid can be disassembled without affecting the operational conditions of the device, thereby simplifying the cleaning of the glass or other maintenance tasks. Additionally, this assembly does not alter the standards for sight glasses as specified in DIN 28120 and those derived from DIN 11851.

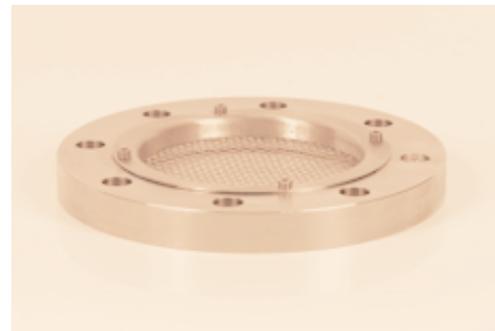

Possible combinations:

The grille is compatible with the complete range of DIN 28120 and DIN 11851 sight glasses, as well as MVSLM type illuminated sight glasses.

USL type projectors can be installed.

This ensures the use of "sight glasses" instead of "portholes," which aligns with your previous instructions. Let me know if you need further adjustments!

<https://www.gallet-fr.com>