


Sight glass flange, compliant with ANSI standards, featuring the 13.SW series wiper.

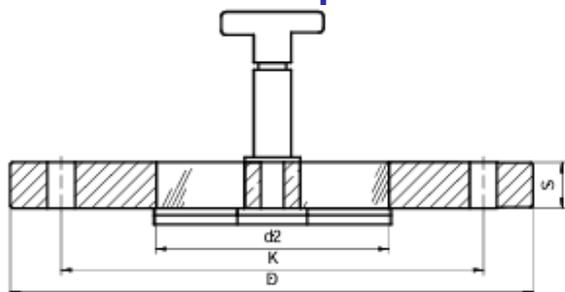

For

- Flat flange with flat gasket seating, according to ANSI

Advantages :

- Absolute safety
- Easy assembly
- Maximum viewing diameter
- Minimal footprint
- Possible combination with a projector

Construction standard:

- Compliant with DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1
- Compliant with AD Merkblatt W0/TRD 100 and DIN 7079
- Material compliant with DIN/EN standards
- Borosilicate glass compliant with DIN 7080

Operating conditions:

- PN10 to PN16, other pressures on request
- Max service temperature: 150°C
- Material: 1.4462, 2.6402, 2.4605, 2.4610 u.a.
- Stainless steel insert for wiper: 1.3912 (Alloy 36)

Material certificate:

- Compliant with EN 10204-3.1B

Wiper:

- Material: Stainless steel 1.4571 (316Ti), Hastelloy C22, C276
- Blades: Silicone, PTFE
- O-ring: Viton, Chemraz, Viton/FEP

Ring composition	Serving temperature
1.4462	-30°C to +150°C
1.0570	-10°C to +150°C
2.4602	-60°C to +150°C
2.4610	-60°C to +150°C
2.4605	-60°C to +150°C

Flange				Glass	Still		Gasket
DN	D	K	S	d2	n	d	
1½"	127,0	98,6	16	40	4	15,7	127,0x41x2
2"	152,4	120,7	20	50	4	19,1	152,4x53x2
2½"	177,8	139,7	20	60	4	19,1	177,8x63x2
3"	190,5	152,4	20	75	4	19,1	190,5x90x2
4"	228,6	190,5	20	100	8	19,1	228,6x103x2
6"	279,4	241,3	25	140	8	22,4	279,4x154x2
8"	342,9	298,5	25	160	8	22,4	342,9x203x2

<https://www.gallet-fr.com>