
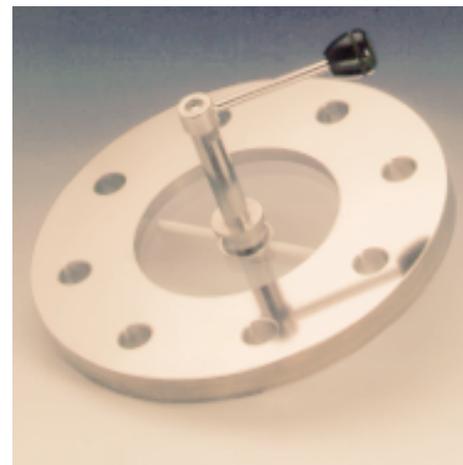


Flange - Sight glass with wiper series 11.SW

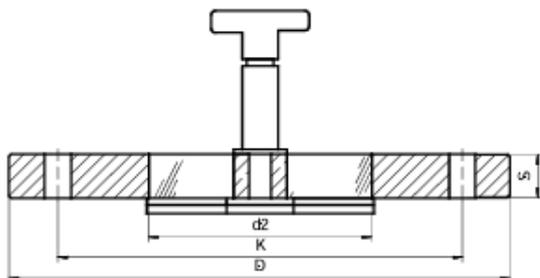

For

- SO Flat Flange with Flat Gasket Seating

Advantages :

- Absolute safety
- Easy assembly
- Maximum sight diameter
- Minimal footprint

Construction Standard:

- Compliant with DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)
- Compliant with AD Merkblatt W0/TRD 100 and DIN 7079
- Material compliant with DIN/EN standards
- Borosilicate glass compliant with DIN 7080

Approval:

- TÜV, for flanges PN6 to PN40

Material Certificate:

- Compliant with EN 10204-3.1B

Wiper System:

- Material: Stainless steel 1.4571 (316Ti), Hastelloy C22, C276
- Blades: Silicone, PTFE
- O-Ring: Viton, Chemraz, Viton/FEP

Ring composition	Serving temperature
1.4462	-30°C to +150°C
1.0570	-10°C to +150°C
2.4602	-60°C to +150°C
2.4610	-60°C to +150°C
2.4605	-60°C to +150°C

Flange				Glass	Still			Gasket
DN	D	K	S	d2	n		d	
40	150	110	16	40	4	M16	18	150x70x2
50	165	125	18	50	4	M16	18	165x85x2
65	185	145	18	70	4	M16	18	185x105x2
80	200	160	20	80	4	M16	18	200x120x2
100	220	180	20	100	4	M16	18	220x140x2
125	250	210	22	125	8	M16	18	250x170x2
150	285	240	25	140	8	M20	22	285x195x2
200	340	295	25	160	8	M20	22	340x250x2

<https://www.gallet-fr.com>