
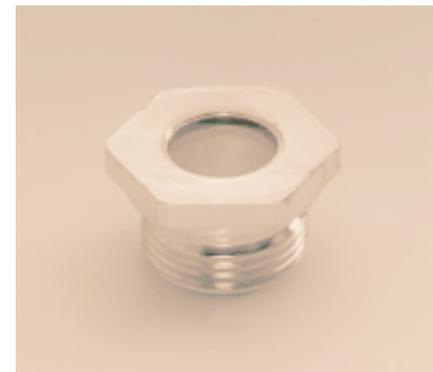


## Screw-in Sight glass - Hexagonal Series 61

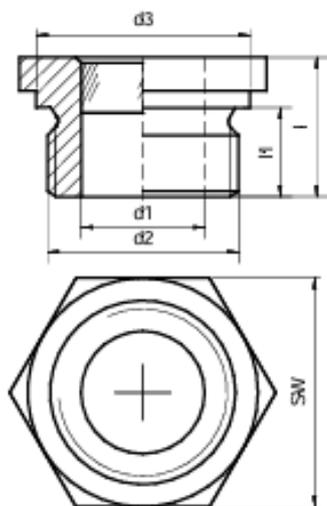

### For

- For piping or threaded fitting

### Advantages:

- Compact part
- High-pressure resistance
- Easy assembly
- Long lifespan

### Construction Standard:

- Compliant with DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)
- Compliant with AD Merkblatt W0/TRD 100 and DIN 70799
- Material in accordance with DIN/EN standards
- Borosilicate glass according to DIN 7080

### Service Conditions:

- Pressure: 50 bar
- Temperature: max. 150°C

### Material Certificate:

- According to EN 10204 - 3.1B

### Dimensions:

According to DIN 3852 Form F (sealed with an O-Ring)

### Materials:

- Ring: 1.0570, 1.4462, 1.4523
- Glass quality: AR-Glas, borosilicate

d2		SW	d1	d3	l	l1
M	R					
M18x1.5		24	10	23	20	12
	R3/8"	24	10	23	20	12
M20x1,5		27	12.5	25	23	14
	R1/2"	27	12.5	25	23	14
M26x1,5		32	16.5	32	25	6
M27x2	R3/4"	32	16.5	32	25	16
M33x2		41	22	40	25	16
	R1"	41	22	40	25	16
M42x2		50	24	50	25	16
	R1 1/4"	20	24	50	25	16
M48x2		55	26	55	25	16
	R1 1/2"	55	26	55	25	16
M60x2		70	34	68	30	20
	R2"	70	34	68	30	20
M78x2		90	44	88	30	20
	R2 1/2"	90	44	88	30	20

<https://www.gallet-fr.com>