


## Screw-in Sight glass Series 64

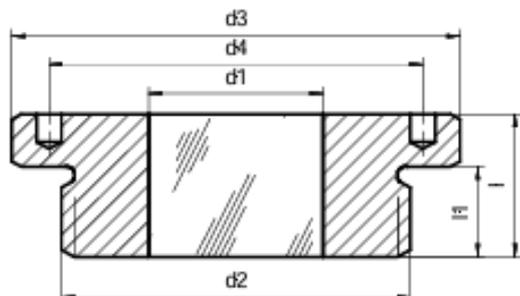

### For :

- Piping or threaded fitting

### Advantages:

- Compact design
- High-pressure resistance
- Easy assembly
- Long service life

### Construction Standard:

- Compliant with DIN/EN/ISO 9001 97/23/EG 02/98, Module H/H1
- Compliant with AD Merkblatt W0/TRD 100 and DIN 7079
- Material according to DIN/EN standards
- Borosilicate glass according to DIN 7080

### Operating Conditions:

- Pressure: 100 bar

### Material Certificate:

- According to EN 10204 - 3.1B

### Dimensions:

According to DIN 3852 Form F (sealing with an O-Ring)

### Material:

- Ring: 1.0570, 1.4462, 1.4523
- Glass Quality: AR-Glass (150°C), borosilicate (280°C)

d1 (view diameter)		d2 (threaded component)		d3	d4	l	l1
AR Glasses	Borosilicate	M	R				
10	6	M18x1.5		23	19	16.5	10
10	6		R3/8"	23	19	16.5	10
12.5	8	M20x1,5		25	21	18	11
12.5	8		R1/2"	26	21.5	18	11
16.5	10	M26x1,5		31	27	18	11
16.5	10	M27x2	R3/4"	32	27	18	11
22	12	M33x2		40	34	19	11
22	12		R1"	40	34	19	11
24	16	M42x2		50	40	23	12
24	16		R1 1/4"	50	40	23	12
26	20	M48x2		55	44	23.5	14
26	20		R1 1/2"	55	44	23.5	14
34	25	M60x2		68	54	24.5	15
34	25		R2"	68	54	24.5	15
44	25	M78x2		88	70	25.5	16
44	25		R2 1/2"	88	70	25.5	16

<https://www.gallet-fr.com>