


Porthole ring featuring interlocking Technical Sheet Series 74

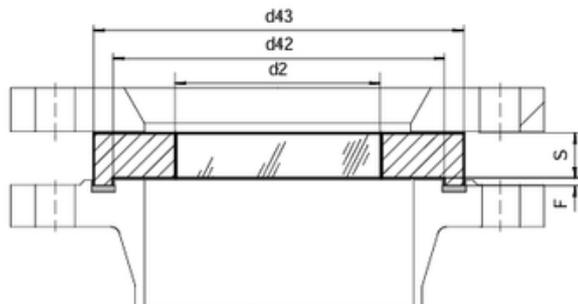

For

- Baseplate according to DIN 28115 bzw. 28025
- Weld-on flange according to DIN 2632 to 2636
- Socket weld flange type C

Advantages:

- Absolute safety
- Easy assembly
- High durability

Certifications:

- TÜV
- EEx

Construction Standard:

- According to DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1
- According to AD Merkblatt W0/TRD 100 and DIN 7079
- Material in accordance with DIN/EN standards
- Borosilicate glass according to DIN 7080
- DIN 7079

Material Certificate:

- According to EN 10204 - 3.1B

Ring composition	Serving temperature
1.4462	-30°C to +280°C
1.0570	-10°C to +300°C
2.4602	-60°C to +300°C
2.4605	-60°C to +300°C
2.4610	-60°C to +300°C

DN	Pression max.				emboitement		
	16 bars		40 bars		d42	d43	F
	d2	S	d2	S			
40	35	10	35	15	61	75	4
50	45	12	45	15	73	87	4
65	60	12	60	15	95	109	4
80	63	15	63	20	106	120	4
100	70	15	70	25	129	149	4,5
125	80	20	80	30	155	175	4,5
150	100	20	100	30	183	203	4,5
200	125	30	-	-	239	259	4,5

<https://www.gallet-fr.com>