


Fully aseptic illuminating sight glass ring Metaclamp for clamp connection, compatible with projector type USL-33

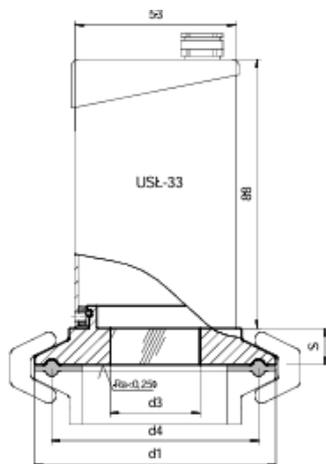

For

- Clamp connection according to DIN 32 676 / ISO 2852

Avantages :

- Aseptic assembly
- Compact design
- Total safety
- Easy cleaning, no retention zones
- High durability

Approval:

- A3 Standard for the food industry

Construction Standard:

- According to DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)
- According to AD Merkblatt W0/TRD 100 and DIN 7079
- Material in accordance with DIN/EN standards
- Borosilicate glass according to DIN 7080

Operating Conditions:

- Pressure: -1 to 16 bar
- Temperature: See table

Material Certificate:

- According to EN 10204-3.1B

Projector Type USL-33 (Non-Ex):

- Voltage: DC or AC
 - 24V halogen lamp (20W, without push button)
 - 50W halogen lamp (with push button)
- Housing: Stainless steel 1.4301 (304)
- Maximum temperature at cable gland: 90°C
- Dust and water jet resistant: IP65 according to EN 60 529 / DIN VDE 0470 Part 1

Stainless steel as a ring material	Serving temperature
- 1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4610	-60°C to +300°C

Dimensions		d1	d3	d4	S	Maximum Pressure
DN	Thumb					
25/32/40	1", 1½"	50,5	25	43,5	7	16
50	2"	64	30	56,5	7	16
/	2½"	77,5	35	70,5	10	10
65	3"	91	38	83,5	10	10
80	*3½"	106	38	97	10	10
100	*4"	119	38	110	12	10
/	*6"	167	38	156.5	16	6

<https://www.gallet-fr.com>