


Metaclamp aseptic Sight glass ring for clamp connection Series 80 datasheet

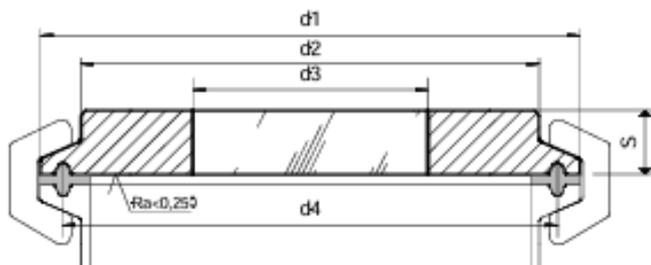

For

- Clamp fitting according to DIN 32 676 / ISO 2852
- Fitting according to DIN 32 676 / ISO 2852

Advantages:

- **Aseptic assembly**
- Absolute safety
- Compact design, easy cleaning
- Long lifespan

Construction Standard:

- Compliant with DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)
- Compliant with AD Merkblatt W0/TRD 100 and DIN 7079
- Material in accordance with DIN/EN standards
- Borosilicate glass according to DIN 7080

Service Conditions:

- **Pressure and temperature: see table**

Material Certificate:

- **According to EN 10204 - 3.1B**

Ring composition	Serving temperature
1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4610	-60°C to +300°C

DN	THUMB	d1	d2	d3	d4	S	Pression maximale
10/15/20	½", ¾"	34	21	12	27.5	7	16
25/32/40	1", 1½"	50.5	41	25	43.5	7	16
50	2"	64	52	30	56.5	7	16
	2½"	77.5	69	35	70.5	10	10
65	3"	91	76	40	83.5	10	10
80	3½"	106	90	50	97	10	10
100	4"	119	102	55	110	12	10
	6"	167	152	75	156.5	16	6
150		183	160	75	174.3	16	6
	8"	217.5	198	100	207.4	16	6
200		233.5	210	100	225.1	16	6
	10"	268	245	10	257.8	18	6
250		287.5	266	120	278.4	18	6
	12"	319.3	300	140	309.1	20	6
300		338.3	316	140	328.4	20	6

<https://www.gallet-fr.com>