


Sight glass ring for DIN 11851 connection

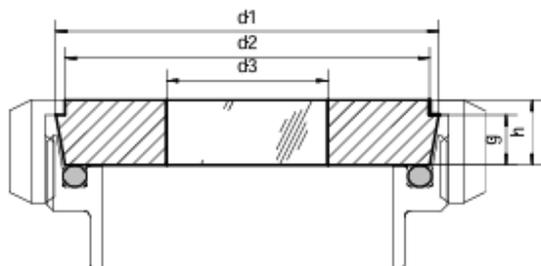

For

- Connection in accordance with DIN 11851

Advantages:

- Absolute security
- Extended lifespan
- Effortless cleaning, no retention area
- Minimum footprint

Construction standard:

- According to DIN/EN/ISO 9001 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)
- According to AD Merkblatt W0/TRD 100 and DIN 7079
- Material in accordance with DIN/EN standards
- Borosilicate glass in accordance with DIN 7080

Operating Conditions:

Temperature: See table

Material Certificate:

according to EN 10204 - 3.1B

Ring composition	Serving temperature
1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4605	-60°C to +300°C
2.4610	-60°C to +300°C

DN	D1	D2	D3	h	g	Maximum pressure
32	50	41	23	13	10	40
40	56	48	25	13	10	40
50	68.5	61	35	14	11	25
65	86	79	45	16	12	25
80	100	93	50	16	12	16
90	111	103	55	20	15	16
100	121	114	60	20	15	16
125	150	137	70	23	17	16
150	176	163	80	24	18	16

<https://www.gallet-fr.com>