


Sight glass ring for screw-in sight glass MV

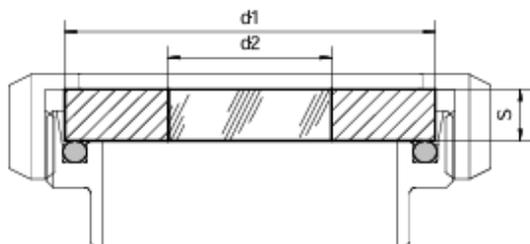

For

Connection in accordance with DIN 11851

Advantages:

- Absolute security
- Extended lifespan
- Simple assembly and maintenance

Construction standard:

- According to DIN/EN/ISO 9001 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)
- According to AD Merkblatt W0/TRD 100 and DIN 7079
- Material in accordance with DIN/EN standards
- Borosilicate glass in accordance with DIN 7080

Operating Conditions:

- Temperature: refer to the table

Material Certificate:

- according to EN 10204 - 3.1B

Ring composition	Serving temperature
1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4605	-60°C to +300°C
2.4610	-60°C to +300°C

DN	D1	D2	S	Pression maximale
32	45	25	10	40
40	50	25	10	40
50	63	35	10	16
65	80	45	10	10
80	93	50	10	10
100	113	60	15	16
125	142	75	20	16
150	166	80	20	16

<https://www.gallet-fr.com>