


## Metaglas Type 76 LBS Sight glass ring

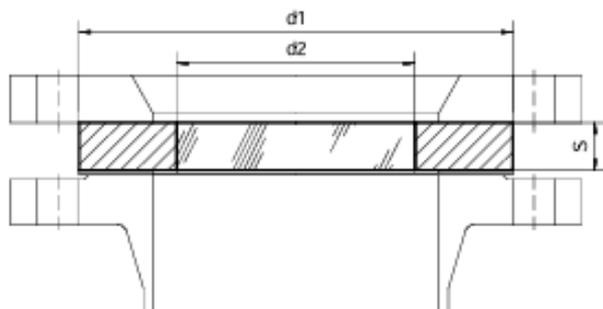

### For

- Sight Glass according to DIN 28121
- Use: In the chemical industry
- Suitable for ANSI flanges

### Advantages:

- Absolute safety
- Easy assembly
- High durability

### Certifications:

- TÜV
- EEx
- DIN 7079

### Construction Standards:

- Compliant with DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1
- According to AD Merkblatt W0/TRD 100 and DIN 7079
- Material in accordance with DIN/EN standards
- Borosilicate glass according to DIN 7080
- DIN 7079

### Material Certificate:

- In accordance with EN 10204 - 3.1B

### Operating Conditions:

- Pressure: PN10 to PN64, other pressures upon request
- Temperature: See table

Ring composition	Serving temperature
1.4462	-30°C to +280°C
1.0570	-10°C to +300°C
2.4602	-60°C to +300°C
2.4605	-60°C to +300°C
2.4610	-60°C to +300°C

DN	Pression de service					
	150 lbs			300 lbs		
	d1	d2	S	d1	d2	S
½"	70	30	10	70	30	15
1"1/2	82	40	12	82	40	15
1"3/4	92	45	15	92	45	20
2"	107	50	15	107	50	20
2"1/2	127	70	15	127	70	25
3"	142	75	20	142	75	25
4"	162	80	20	162	80	25
5"	192	100	20	192	100	30
6"	218	100	25			
8"	273	120	30			

<https://www.gallet-fr.com>