


Metaglas Type 76 porthole frame

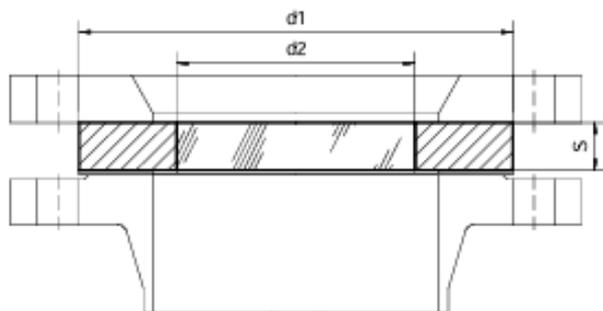

For

- Sight Glass according to DIN 28121
- Use in the chemical industry

Advantages:

- Absolute safety
- Easy assembly
- High durability

Certifications:

- TÜV
- EEx

Construction Standard:

- According to DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1
- According to AD Merkblatt W0/TRD 100 and DIN 7079
- Material in accordance with DIN/EN standards
- Borosilicate glass according to DIN 7080
- DIN 7079

Material Certificate:

- According to EN 10204 - 3.1B

Operating Conditions:

- Pressure: PN10 to PN64, other pressures available on request
- Temperature: See table

Ring composition	Serving temperature
1.4462	-30°C to +280°C
1.0570	-10°C to +300°C
2.4602	-60°C to +300°C
2.4605	-60°C to +300°C
2.4610	-60°C to +300°C

Nominal Bore	Pression service					
	16 bar			40 bar		
	d1	d2	S	d1	d2	S
25	70	30	10	70	30	15
32	82	40	12	82	40	15
40	92	45	15	92	45	20
50	107	50	15	107	50	20
65	127	70	15	127	70	25
80	142	75	20	142	75	25
100	162	80	20	162	80	25
125	192	100	20	192	100	30
150	218	100	25			
200	273	120	30			

<https://www.gallet-fr.com>